


По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72	Краснодар (861)203-40-90	Рязань (4912)46-61-64
Астана (7172)727-132	Красноярск (391)204-63-61	Самара (846)206-03-16
Белгород (4722)40-23-64	Курск (4712)77-13-04	Санкт-Петербург (812)309-46-40
Брянск (4832)59-03-52	Липецк (4742)52-20-81	Саратов (845)249-38-78
Владивосток (423)249-28-31	Магнитогорск (3519)55-03-13	Смоленск (4812)29-41-54
Волгоград (844)278-03-48	Москва (495)268-04-70	Сочи (862)225-72-31
Вологда (8172)26-41-59	Мурманск (8152)59-64-93	Ставрополь (8652)20-65-13
Воронеж (473)204-51-73	Набережные Челны (8552)20-53-41	Тверь (4822)63-31-35
Екатеринбург (343)384-55-89	Нижний Новгород (831)429-08-12	Томск (3822)98-41-53
Иваново (4932)77-34-06	Новокузнецк (3843)20-46-81	Тула (4872)74-02-29
Ижевск (3412)26-03-58	Новосибирск (383)227-86-73	Тюмень (3452)66-21-18
Казань (843)206-01-48	Орел (4862)44-53-42	Ульяновск (8422)24-23-59
Калининград (4012)72-03-81	Оренбург (3532)37-68-04	Уфа (347)229-48-12
Калуга (4842)92-23-67	Пенза (8412)22-31-16	Челябинск (351)202-03-61
Кемерово (3842)65-04-62	Пермь (342)205-81-47	Череповец (8202)49-02-64
Киров (8332)68-02-04	Ростов-на-Дону (863)308-18-15	Ярославль (4852)69-52-93

Единый адрес: btk@nt-rt.ru **Веб-сайт:** www.burkert.nt-rt.ru

Электромагнитные клапаны для агрессивных и чистых сред Burkert

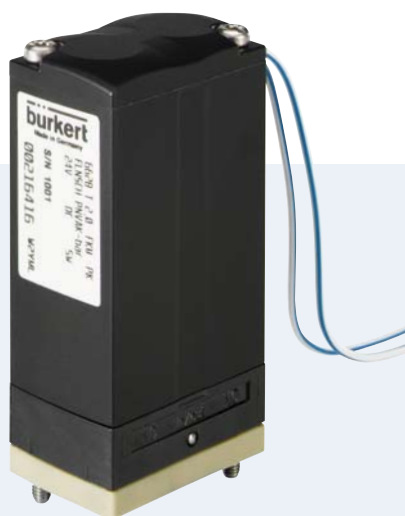


2/2- and 3/2-way Rocker Solenoid Valve

- 22 mm ultra compact design with orifices up to DN 3.0
- Isolating diaphragm for high chemical resistance
- Circuit function NC, NO and 3-way universal
- Back pressure tightness via rocker principle
- Minimal internal volume with excellent cleanability

Direct acting medium separated 2/2- and 3/2-way Rocker Solenoid Valve for control of aggressive fluids and gases in analytical medical applications, the food industry, and also the chemical industry for dosing, filling, mixing and distribution.


The medium is in contact with fluid housing and seal material solely through the isolating diaphragm. This valve with the new TwinPower-actuator, robust screw-in connection and 22 mm installation width, will fulfil the highest requirements. The established rocker solenoid technology is characterized through full back pressure tightness, good rinsing capability and low internal volume. Type 6628 is available in different technical versions and by virtue of several body options, it offers a perfect adaptation in fluid applications.

Circuit function A




2/2-way valve,
direct acting,
normally closed

Circuit function B



2/2-way valve,
direct acting,
normally open

Circuit function T






3/2-way valve,
direct acting,
universal function

Other circuit functions on request.


Technical Data	
Orifice	DN 2.0 or 3.0 mm
Body material	PEEK or PPS (PVDF, PP on request)
Seal material	FFKM, FKM or EPDM
Medium	Resistant to neutral and aggressive gases and liquids acc. to our chemical resistance chart
Medium temperature	
FKM	0 to +55 °C
FFKM	+10 to +55 °C
EPDM	-10 to +55 °C
Ambient temperature	
FKM	0 to +55 °C
FFKM	+10 to +55 °C
EPDM	-10 to +55 °C
Internal volume	approx. 200 µl
Viscosity	max. ca. 21 mm ² /s
Port connection	<ul style="list-style-type: none"> ▪ Bürkert-Flange (22 x 35 mm) ▪ G 1/8 ▪ NPT 1/8 ▪ Barbed hose connector 4 mm (5/32") ▪ Push-in connector (tube's external diameter 6mm)
Electrical connection	<ul style="list-style-type: none"> ▪ PFA single flying leads, 0,5mm², 500mm ▪ Rectangular plug for cable plug Type 2505 ▪ Industry plug acc. to DIN 43650 Form B for cable plug Type 2507 on request ▪ circular connector M8 on request
Power supply	12 V DC, 24 V DC Other voltages on request
Voltage tolerance	±10%
Power consumption	5 W
Duty cycle	100 % continuous operation
Installation	As required, preferably with actuator upright
Protection class	IP 54 (IP40 with rectangular plug Type 2505)
Response times	Measurement at valve output with 2 bar and 20 °C acc. to DIN ISO 12238:2001
opening	25 ms (pressure build-up 0-10%)
closing	25 ms (pressure build-up 100-90%)
Manual override	on request

Ordering chart

Circuit function	Orifice [mm]	Port connection	Kv value water [m³/h]	Q _{no} value air [l/min]	Pressure range [bar]	Max. pressure difference [bar]	Seal material	Body material	Electrical connection	Voltage/ Frequency [V/Hz]	Item no.				
A  2/2-way valve, direct acting, NC	2	Bürkert-Flange	0.1	110	Vac-5	5	EPDM	PPS	Rectangular plug	24/DC	250 857				
	3		Hose connector	G 1/8	0.17	180		Vac-3	3	PPS	Flying leads, 500 mm	12/DC	251 614		
											PEEK	Rectangular plug	24/DC	241 727	
												Flying leads, 500mm		246 199	
												Plug top		242 030	
												Plug top		251 643	
		PEEK									Flying leads, 500 mm	24/DC	251 613		
	Plug top		236 170												
	Plug top		251 644												
	2	Bürkert-Flange	0.1	110	Vac-5	5	FKM	PPS	Rectangular plug	24/DC	251 618				
	3		Hose connector	G 1/8	0.17	180		Vac-3	3	PPS	Flying leads, 500 mm	12/DC	251 620		
											PEEK	Rectangular plug	24/DC	246 382	
												Flying leads, 500mm		248 017	
												Plug top		251 624	
												Plug top		238 616	
		PEEK									Flying leads, 500 mm	24/DC	251 628		
	Plug top		242 340												
	Plug top		238 615												
	PPS	Push-in connection	PPS	Flying leads, 500mm	251 650										
		2	Bürkert-Flange	0.1	110	Vac-5	5	FFKM	PEEK	Rectangular plug	24/DC	235 315			
		3		Hose connector	G 1/8	0.17	180			Vac-3	3	PEEK	Flying leads, 500 mm	12/DC	234 350
	FFKM												Rectangular plug	24/DC	235 316
													Flying leads, 500 mm		235 317
													Flying leads, 500 mm		230 304
													Flying leads, 500 mm		235 318
FFKM	Push-in connection		FFKM						Flying leads, 500mm				235 319		
	B  2/2-way valve, direct acting, normally open	3	Bürkert-Flange	0.17	180	Vac-3	3		FFKM	PEEK	Flying leads, 500 mm	24/DC	251 686		
		T  3/2-way valve, direct acting, Universal version	2	Bürkert-Flange	0.1	110	Vac-5		5	EPDM	PPS	Rectangular plug	24/DC	250 859	
3			Hose connector		G 1/8	0.17	180	Vac-2	2		PPS	Flying leads, 500 mm	12/DC	241 889	
												PEEK	Rectangular plug	24/DC	241 726
													Flying leads, 500mm		251 616
													Plug top		245 256
													Plug top		251 645
	PEEK			Flying leads, 500 mm								24/DC	251 617		
Plug top			245 205												
Plug top			251 647												
2	Bürkert-Flange		0.1	110	Vac-5	5	FKM	PPS	Rectangular plug	24/DC	251 629				
3			Hose connector	G 1/8	0.17	180		Vac-2	2	PPS	Flying leads, 500 mm	12/DC	251 630		
											FFKM	Rectangular plug	24/DC	251 633	
												Flying leads, 500mm		251 634	
												Plug top		251 635	
												Plug top		251 684	
	PEEK										Flying leads, 500 mm	24/DC	251 637		
Plug top			251 638												
Plug top			251 649												
PPS	Push-in connection		PPS	Flying leads, 500mm	251 685										

- Kv-value water [m³/h] max. flow rate for water measured at +20° C, 1 bar pressure to atmosphere
- Rectangular plug types delivered without plug (see ordering chart for accessories)

Ordering chart, continued

Circuit function	Orifice [mm]	Port connection	Kv value water [m³/h]	Q _{vis} value air [l/min]	Pressure range [bar]	Max. pressure difference [bar]	Seal material	Body material	Electrical connection	Voltage/ Frequency [V/Hz]	Item no.
<div><div><div>T</div><div>A</div><div></div><div>P₁ P₂</div></div><div>3/2-way valve, direct acting, Universal version</div></div>	2	Bürkert-Flange	0.1	110	Vac-5	5	FFKM	PEEK	Rectangular plug	24/DC	235 320
									Flying leads, 500 mm	12/DC	234 340
	3	Hose connector	0.17	180	Vac-2	2			Rectangular plug	24/DC	235 322
									Flying leads, 500 mm		230 305
									235 323		
									235 325		

- Kv-value water [m³/h] max. flow rate for water measured at +20° C, 1 bar pressure to atmosphere
- Rectangular plug types delivered without plug (see ordering chart for accessories)



i Further versions on request

Electrical connection
Cable plug connection acc. to Form B (industrial standard)
Flying leads


Material
Other Body and Seal materials on request

Ordering chart for accessories

Rectangular plug Type 2505

	Accessories	Item no.
	Rectangular cable plug Type 2505 with 3 m cable	133 486
	Rectangular cable plug Type 2505 with 300 mm flying leads	644 068

Cable Plug Type 2507 according to Industrial standard Form B


	Accessories	Version	Voltage	Item no.
	Cable Plug Type 2507	without Circuitry	0 ... 250 V AC/DC	423 845
		with LED	24 V AC/DC	423 849

Ordering chart for manifold




Multiple Manifolds with individual service port (G1/8) and diverter function on 2 common channels (G1/8);
Delivery without valves; Material: anodized aluminium

Manifold	A [mm]	Item no.
2-fold	47	669 571
3-fold	69	672 633
4-fold	91	669 572
5-fold	113	672 661
6-fold	135	669 570
10-fold	223	672 660


▪ Other versions on request.

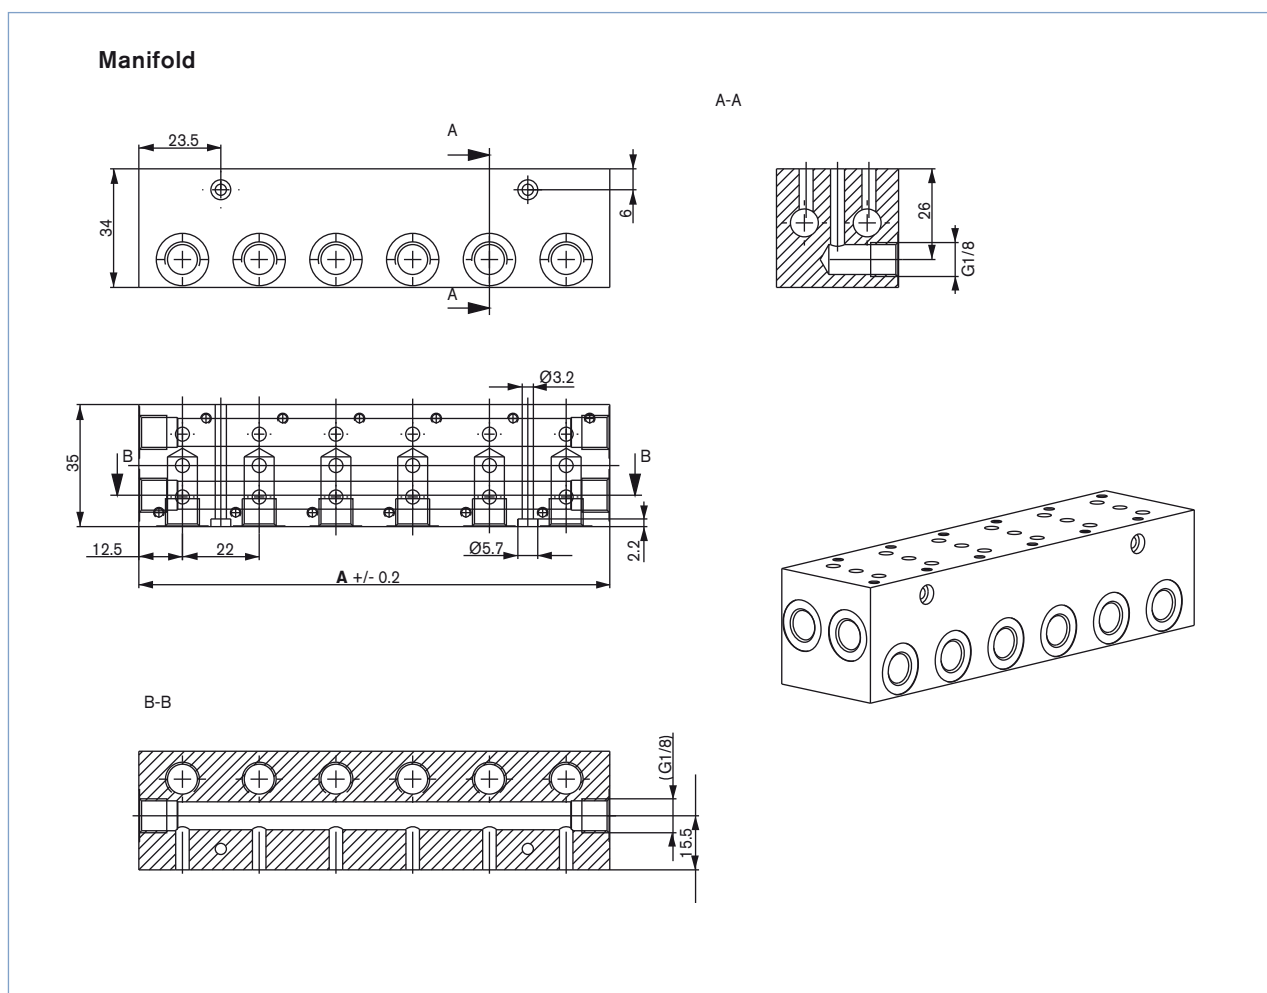


Dimensions [mm]

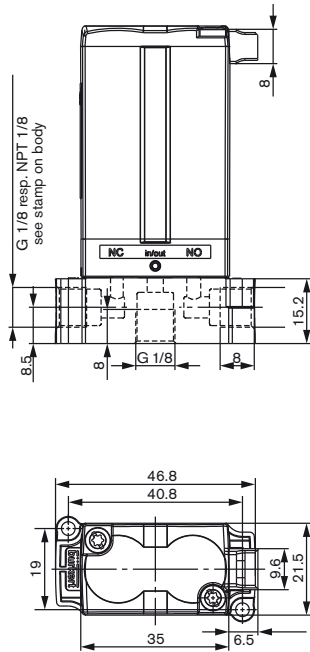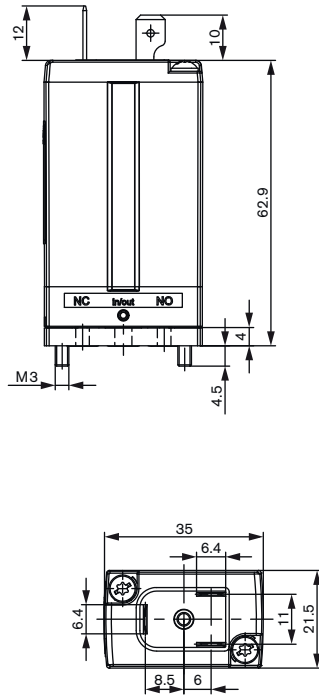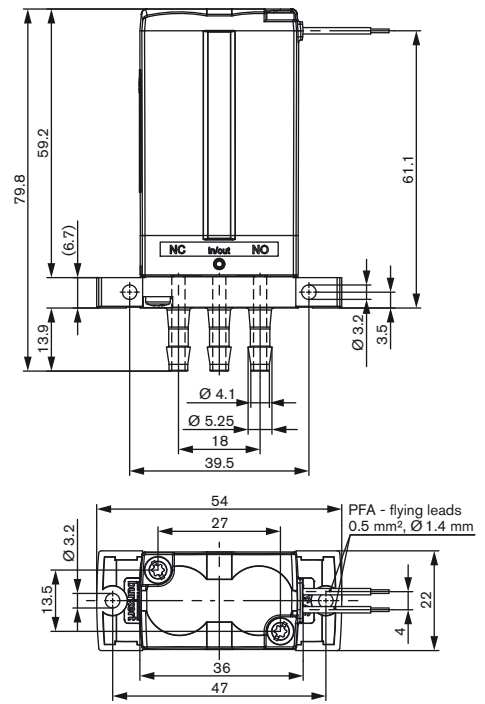Threaded port version
with Rectangular plugFlange version
for Cable PlugBarbed hose connector
with Flying leads

Flange interface for manifold



Push-in connector

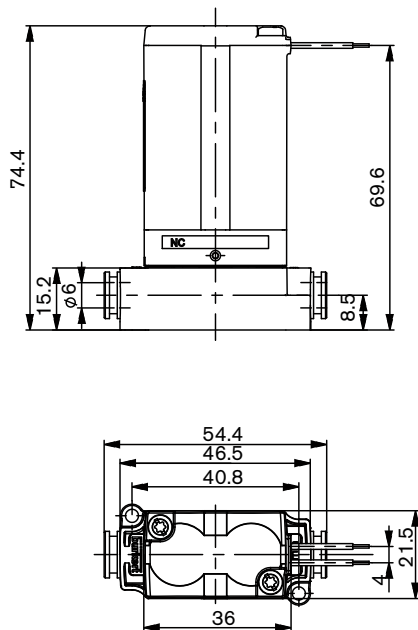


Classification of fluid connections

2/2-way-valve, normally closed (Circuit function A)
inflow at "NC"-connector

2/2-way-valve, normally open (Circuit function B)
inflow at "NO"-connector

3/2-way-valve, universal (Circuit function T)
flow as required

Materials

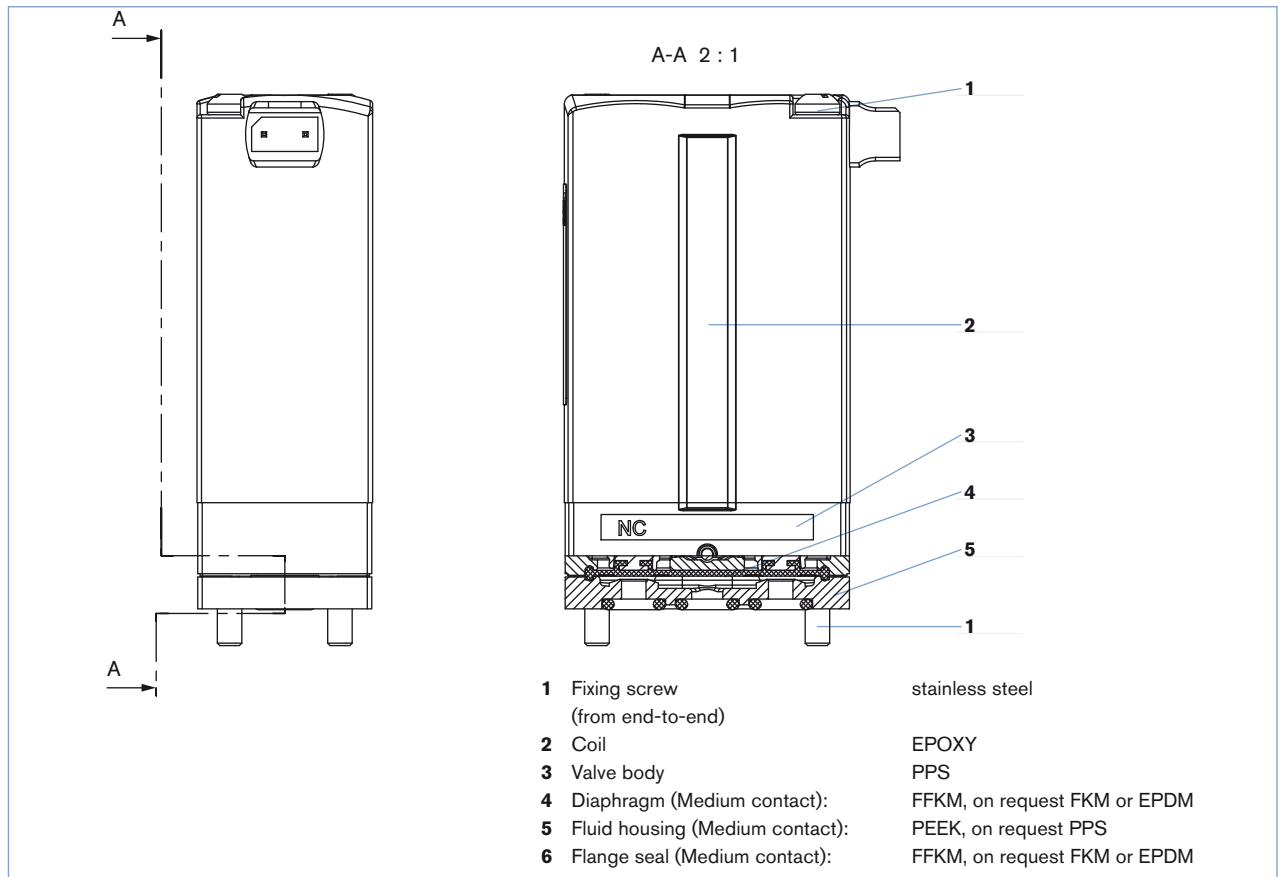

Application examples

Flying leads valve with plug-in coupling



Rectangular plug with hose connector



Flying leads valve with threaded body



Rectangular plug with manual override and flange



To find your nearest Bürkert facility, click on the orange box →

In case of special application conditions,
please consult for advice.

Subject to alterations
© Christian Bürkert GmbH & Co. KG

1305/2_EU-en_00895161

