

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72	Краснодар (861)203-40-90	Рязань (4912)46-61-64
Астана (7172)727-132	Красноярск (391)204-63-61	Самара (846)206-03-16
Белгород (4722)40-23-64	Курск (4712)77-13-04	Санкт-Петербург (812)309-46-40
Брянск (4832)59-03-52	Липецк (4742)52-20-81	Саратов (845)249-38-78
Владивосток (423)249-28-31	Магнитогорск (3519)55-03-13	Смоленск (4812)29-41-54
Волгоград (844)278-03-48	Москва (495)268-04-70	Сочи (862)225-72-31
Вологда (8172)26-41-59	Мурманск (8152)59-64-93	Ставрополь (8652)20-65-13
Воронеж (473)204-51-73	Набережные Челны (8552)20-53-41	Тверь (4822)63-31-35
Екатеринбург (343)384-55-89	Нижний Новгород (831)429-08-12	Томск (3822)98-41-53
Иваново (4932)77-34-06	Новокузнецк (3843)20-46-81	Тула (4872)74-02-29
Ижевск (3412)26-03-58	Новосибирск (383)227-86-73	Тюмень (3452)66-21-18
Казань (843)206-01-48	Орел (4862)44-53-42	Ульяновск (8422)24-23-59
Калининград (4012)72-03-81	Оренбург (3532)37-68-04	Уфа (347)229-48-12
Калуга (4842)92-23-67	Пенза (8412)22-31-16	Челябинск (351)202-03-61
Кемерово (3842)65-04-62	Пермь (342)205-81-47	Череповец (8202)49-02-64
Киров (8332)68-02-04	Ростов-на-Дону (863)308-18-15	Ярославль (4852)69-52-93

Единый адрес: btk@nt-rt.ru **Веб-сайт:** www.burkert.nt-rt.ru

**АНАЛИТИЧЕСКИЕ
ДАТЧИКИ**




Online Analysis System


- For analysis applications for drinking water and fresh water in industrial processes
- Modular sensor and electronic system:
 - up to 6 measurements in one housing
 - up to 30 analysis sensor cubes in one bÜS system
- Prepared for fieldbus connectivity and remote access
- MEMS technologies allows minimal footprint and minimum sample water demand

Product variants described in the data sheet may differ from the product presentation and description.


Can be combined with




Type MS01
pH Sensor Cube




Type MS02
Chlorine (Cl₂) or chlorine dioxide (ClO₂) Sensor Cube




Type MS03
Conductivity Sensor Cube




Type MS04
ORP Sensor Cube




Type MS05
Turbidity Sensor Cube



Type 8920
Bürkert Communicator

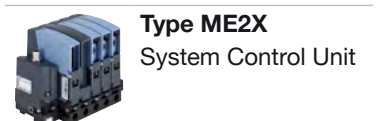

Type ME2X
System Control Unit

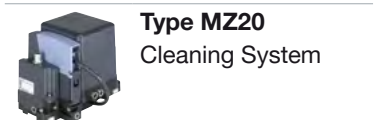

Type MZ20
Cleaning System

Type description

Type 8905 Online Analysis System is a compact and modular system for monitoring all important water parameters on one platform. It is a multichannel measuring system for the Bürkert sensor cubes as well as other electronic modules from the EDIP platform. The efficient device integration platform (EDIP) allows a high flexibility by using modularity in the hardware as well as in the software of the system.

The following parameters can be integrated into an online analysis system:

- pH
- chlorine/chlorine dioxide
- conductivity
- ORP
- turbidity
- temperature

A modular system concept allows the measuring system to be assembled according to customer requirements and enables simple installation and start-up, as well as operation and maintenance.

For maintenance, sensors can be removed without tools, while the remaining sensors continue to measure. The sensors are operated via an integrated 7" touch display or Bürkert Communicator. In addition to the display and storage of analysis parameters, other functions are possible, for example:

- Programming of simple control algorithms using f(x)
- Interventions in the process via analog and digital inputs and outputs
- Performing sensor calibrations.

Type 8905 is available as a compact system in one housing, as well as a customised system. For a system configuration please contact your Bürkert sales center.



1. General technical data

Product properties

Material

Please make sure the device materials are compatible with the fluid you are using. Detailed information can be found in chapter **"2.1. Chemical Resistance Chart – Bürkert resistApp"** on page 4.

Housing	PC (black, UV stabilized, UL94 V0)
Cover of the electronic module housing	PC (glass fibre reinforced, UV stabilized, UL94 V0, anthracite grey), PC (black, UV stabilized, UL94 V0) and glass
Cover of the sensor cube housing	PC (glass fibre reinforced, UV stabilized, UL94 V0, anthracite grey) and PC (transparent)
Studs	Stainless steel
Cable entry plate	Elastomer
Fluid connection	Biopolymer (EPDM seals)
Wall-mounting bracket	Stainless steel
Self-adhesive bumpers	Polyurethane

Dimensions Detailed information can be found in chapter **"3. Dimensions"** on page 5.

Data memory or data-logger	Integrated Micro SD, 2 GB; adjustable logging interval; external reading via USB or LAN port
Display	<ul style="list-style-type: none"> • 780 × 460 pixels resolution • Capacitive 7" Touchscreen, backlit
Weight	<ul style="list-style-type: none"> • Approx. 8 kg (if equipped with 1 × 100...240 V AC power supply module + 1 × HMIU module + 5 sensor cubes) • Up to 12 kg (if totally equipped)

Electrical data

Operating voltage ("SUPPLY")	<ul style="list-style-type: none"> • 100...240 V AC 50/60 Hz <ul style="list-style-type: none"> – current consumption at 100 V AC: 0.8 A – current consumption at 240 V AC: 0.8 A – Integrated protective fuse: a slow blow 2 A fuse. The fuse cannot be replaced and is integrated in the power supply. or • 20...30 V DC, ± 10 % tolerance, filtered and regulated connection to main supply: permanent (through external SELV and LPS power supply)
Power consumption	Max. 96 VA

Medium data

Fluid	Water without particles: drinking water, industrial water
Fluid pH range ¹⁾	pH 4...pH 9
Fluid conductivity	<ul style="list-style-type: none"> • > 50 µS/cm if there is no pH sensor cube • > 100 µS/cm if there is one pH sensor cube
Fluid temperature	+3 °C...+40 °C (+37 °F...+104 °F)
Fluid pressure	Refer to See data sheets of the sensor cubes and accessories, use the lowest pressure
Fluid flow rate	Min. flow rate: 6 l/h per installed sensor module, so with e.g. 3 sensor modules the min. flow rate is 6 + 6 + 6 = 18 l/h due to parallel installation.

Process/Port connection & communication

Sensor cubes	<ul style="list-style-type: none"> • Max. 6 internal sensor cubes, max. 2 measurement water • Max. connection of 30 external sensor cubes via bus • Max. bus length 100 m (without T-connections)
--------------	--

Approvals and Certificates

Standards

Degree of protection acc. to IEC/EN 60529	IP65 with closed and tight housings
---	-------------------------------------

Directives


CE directives	The applied standards, which verify conformity with the EU Directives, can be found on the EU Type Examination Certificate and/or the EU Declaration of conformity (if applicable)
---------------	--

Environment and installation	
Mounting	Wall mount unit, click system with wall-mounting bracket
Ambient temperature	<ul style="list-style-type: none"> • Operation: 0 °C...+40 °C (-4 °F...+104 °F) • Storage: -20 °C...+70 °C (-4 °F...+140 °F) (without sensor cube)
Relative air humidity	<95 %, without condensation
Height above sea level	Max. 2000 m
Operating conditions	Continuous
Equipment mobility	Fixed
Application area	Indoor
Installation category	<ul style="list-style-type: none"> • With an AC switched-mode power supply: category II, according to UL/EN 61010-1 • With a direct DC power supply: Category I, according to UL/EN 61010 - 1
Pollution degree	Degree 2, according to UL/EN 61010-1 with closed and tight housings

1.) When a chlorine sensor cube is present within the system: pH value is restricted to pH 5...pH 9

2. Materials

2.1. Chemical Resistance Chart – Bürkert resistApp

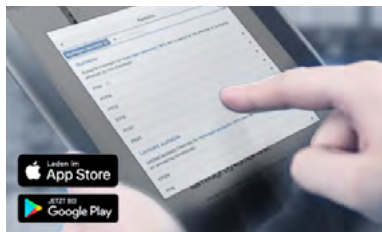


Bürkert resistApp – Chemical Resistance Chart

You want to ensure the reliability and durability of the materials in your individual application case? Verify your combination of media and materials on our website or in our resistApp.


[Start Chemical Resistance Check](#)

2.2. Material specifications

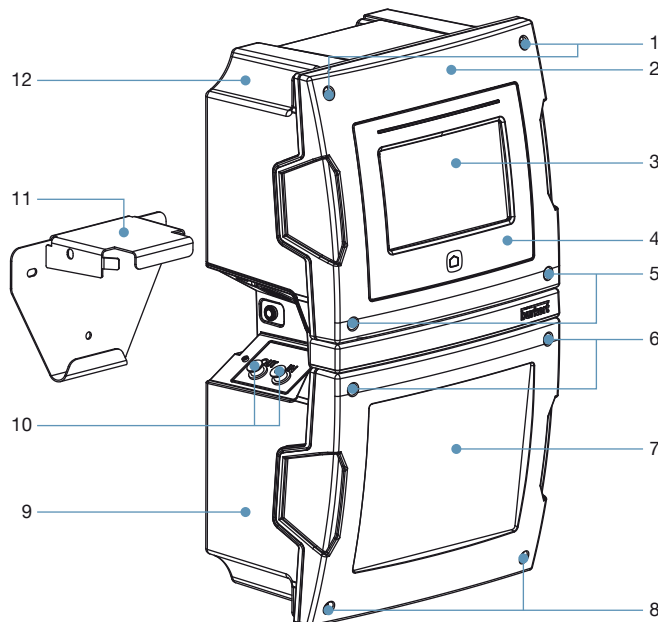

No.	Material
1	Stainless steel
2	PC, glass fibre reinforced, anthracite grey
3	Glass
4	PC, black
5	Stainless steel
6	Stainless steel
7	PC, transparent
8	Stainless steel
9	PC, black
10	Bio polymer, EPDM
11	Stainless steel
12	PC, black

3. Dimensions

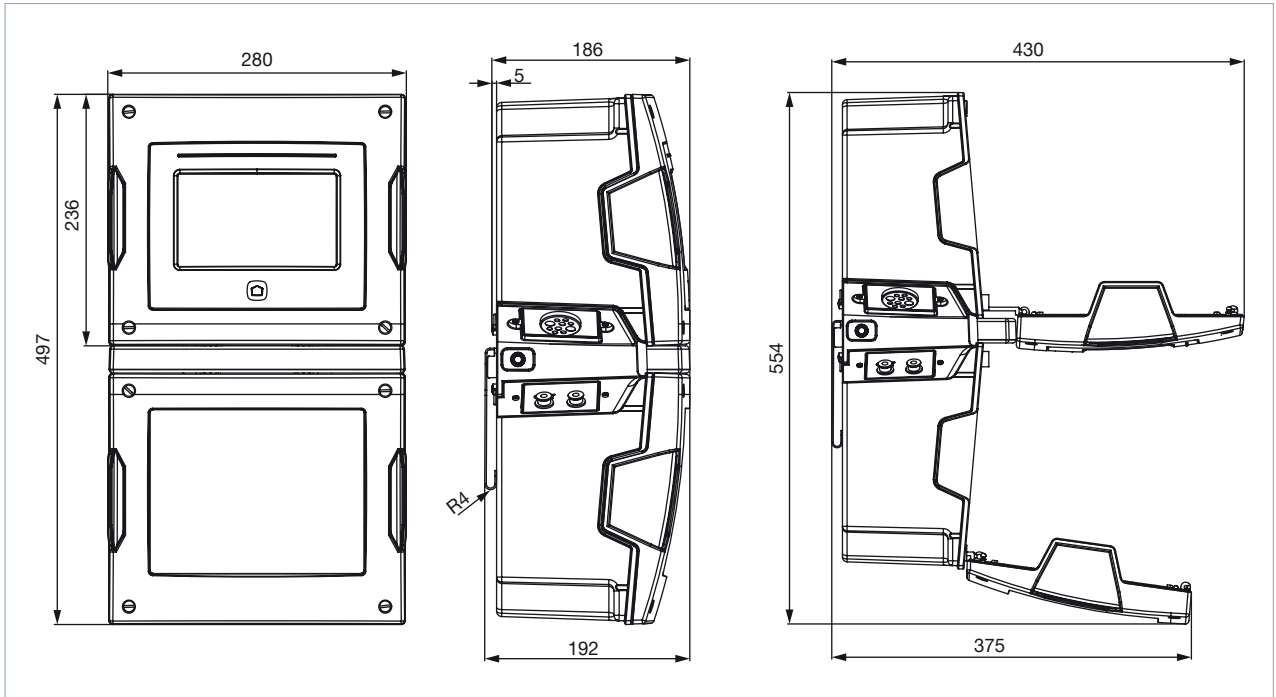

4. Product design and assembly

4.1. Product assembly

Housing for the electric modules

The device is always equipped with the following electronic modules:

- HMIU (Human Machine Interface Unit) incl. USB slot and Ethernet connection
- 7" touchscreen incl. USB slot
- Option: PSU mains supply 100...240 V AC
- 2x bÜS connector


A total of 7 slots (5 for 230V/115V AC version) are available for electronic modules:

- Digital and analogue inputs and outputs
- Fieldbus gateway

The main housing parts for the electric modules are shown in the following drawing.


Depending on the configuration of the device and for a complete description and for the technical data related to the electronic modules, refer to the data sheets of each electronic modules.

See **data sheet Type ME2X** ▶ for more information.

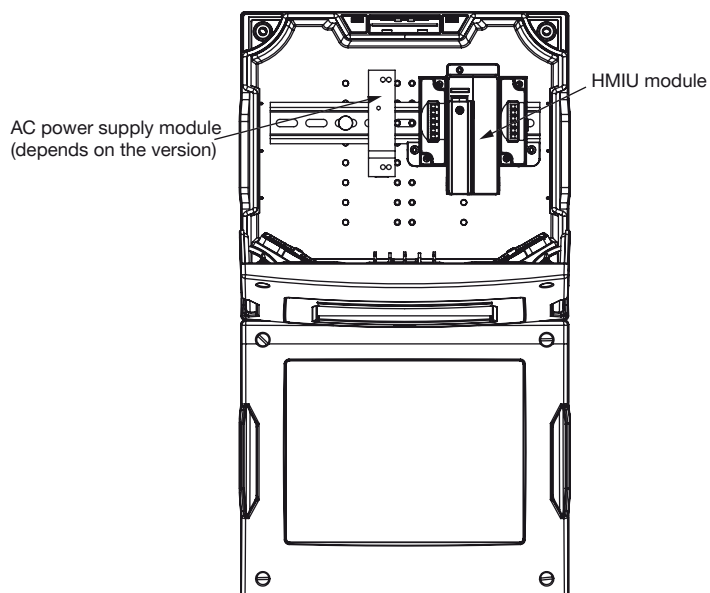

Sensor cube housing

The device can contain one to six sensor cubes. The main housing parts for the sensor cubes are shown in the following drawing. Depending on the configuration of the device and for a complete description and for the technical data related to the sensor cubes, refer to the data sheets of each sensor cubes (see following table).

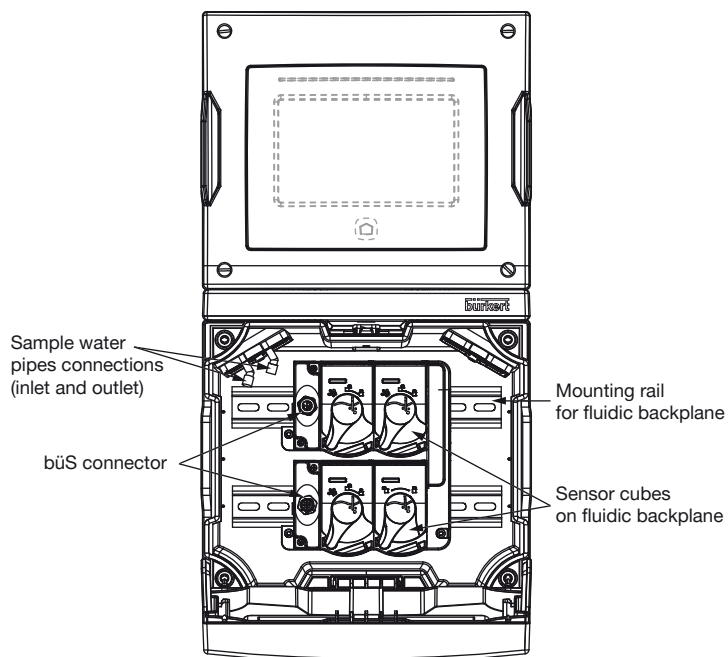


Sensor cubes	Measured physical value	Marking of the push buttons	
pH sensor cube, see data sheet Type MS01 ▶	pH and temperature		
Chlorine sensor cube, see data sheet Type MS02 ▶	Chlorine, chlorine dioxide and temperature		
Conductivity sensor cube, see data sheet Type MS03 ▶	Conductivity and temperature		
ORP sensor cube, see data sheet Type MS04 ▶	Redox potential		
Turbidity sensor cube, see data sheet Type MS05 ▶	Turbidity (ISO and EPA)		

Mechanical interfaces of the sensor cubes

All the fluidic backplanes for the sensor cubes have the same design. Thus any sensor cube can be plugged on any mechanical interface.

The backplanes are connected to each other and feed the sensor cubes parallel with the power supply, the sample water and serial bÜS connection.

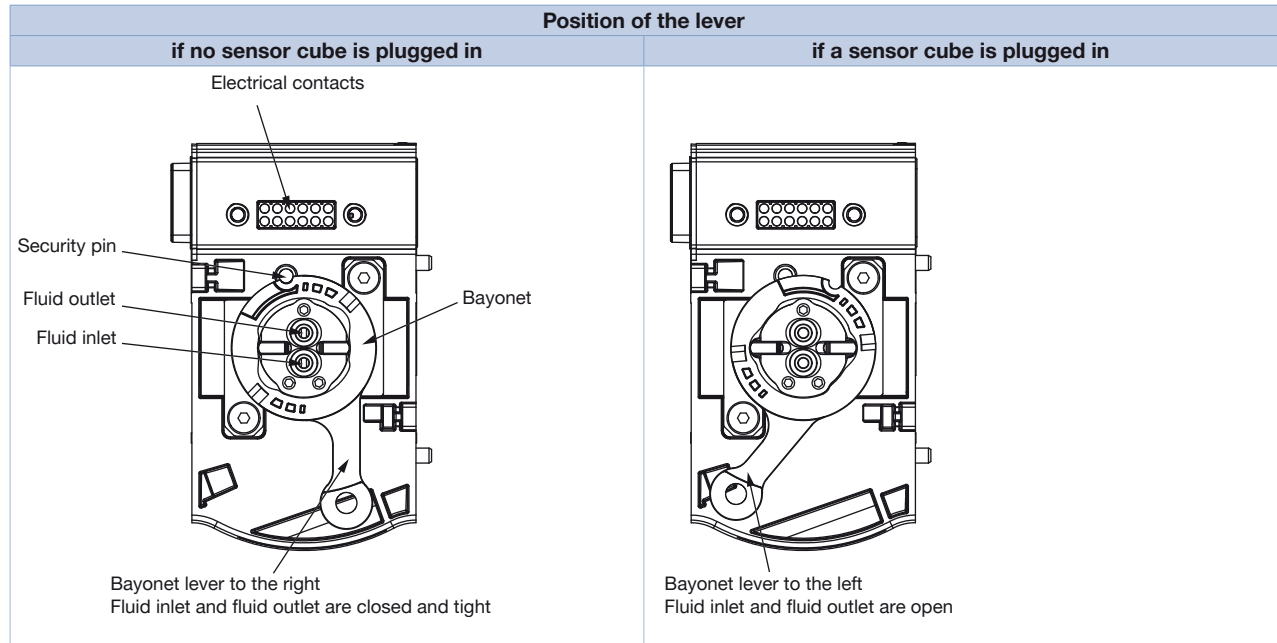

5. Product accessories

Note:

To set up a device without a display, please use the USB-bÜS interface, Type 8920.


See **Software manual Type 8920** ▶ for more information.

Accessories	No.	Description
	1	Quick-Start
	2	Power supply:100...240 V AC/ 24 V DC 1 A and adaptors for power supply worldwide use
	3	bÜS terminating resistor on bÜS Y-splitter
	4	5 pin M12 male connector wired on free end cable
	5	bÜS connection cable with 5 pin M12 plug, micro USB B plug
	6	bÜS adapter with 5 pin M12 plug, A-coded to 5 pin M12 plug, A-coded
	7	bÜS stick (USB to bÜS/CANopen adaptor)
	8	bÜS service cable with 5 pin M12 plug, mini USB and circular plug-in connectors for power supply
	9	Magnetic key
	10	CD-Communicator (30-day license without registration, update and licensing over Bürkert home page)

DTS 1000220829 EN Version: H Status: RL (released | freigegeben | validé) printed: 17.12.2020

6. Ordering information

6.1. Bürkert eShop – Easy ordering and quick delivery



Bürkert eShop – Easy ordering and fast delivery

You want to find your desired Bürkert product or spare part quickly and order directly? Our online shop is available for you 24/7. Sign up and enjoy all the benefits.


[Order online now](#)

6.2. Recommendation regarding product selection

The Online Analysis System Type 8905 is a compact and modular system in a single housing, offering a wide range of configuration possibilities.

Thank you for your interest in our products! In order to provide you with the best possible advice, please contact your local Bürkert branch office for customised system design.

6.3. Bürkert product filter



Bürkert product filter – Get quickly to the right product

You want to select products comfortably based on your technical requirements? Use the Bürkert product filter and find suitable articles for your application quickly and easily.

[Try out our product filter](#)






























6.4. Ordering chart

Note :

This table shows exemplary configurations of the online analysis system.

Description	Operating voltage	Equipment						Article no.
		MS01 sensor cube pH	MS02 sensor cube Chlorine	MS03 sensor cube Conductivity	MS04 sensor cube ORP	MS05 sensor cube Turbidity	PSU: incl. 100...240 V AC power supply	
Online Analysis System – pH, Conductivity, Turbidity	24 V DC	1	–	1	–	1	–	On request
	100...240 V AC	1	–	1	–	1	1	
Online Analysis System – pH, Chlorine, Turbidity	24 V DC	1	1	–	–	1	–	
	100...240 V AC	1	1	–	–	1	1	
Online Analysis System – pH, ORP, Conductivity, Turbidity	24 V DC	1	–	1	1	1	–	
	100...240 V AC	1	–	1	1	1	1	
Online Analysis System – pH, Chlorine, ORP, Turbidity	24 V DC	1	1	–	1	1	–	
	100...240 V AC	1	1	–	1	1	1	
Online Analysis System – pH, Chlorine, Conductivity, ORP, Turbidity	24 V DC	1	1	1	1	1	–	
	100...240 V AC	1	1	1	1	1	1	

6.5. Ordering chart accessories

Description	Article no.	
Sample water pipe 4/6 mm, 5 m	567793 	
Sample water pipe 4/6 mm, 10 m	567701 	
Sample water pipe 4/6 mm, 25 m	567794 	
Strainer 100 µm	772703 	
Pressure reducer	772437 	
Cleaning system, 2 solutions	567124 	
Set including the wall-mounting bracket with four self-adhesive bumpers	566363 	
Set with a pressure reducer (including a 100 µm strainer, a sampling point and two G ¼" connections), a wall-mounting bracket with nut (for the pressure reducer), a pressure gauge (for the pressure reducer) and two quick-connect couplings	566319 	
Bubble trap	568492 	
Filter housing made of plastic with NBR seal for filter element 50 µm, inlet and outlet 1/4"	774292 	
Filter housing made of plastic with NBR seal for filter element 90 µm or 140 µm, inlet and outlet 1/4"	774287 	
Filter element 50 µm	774293 	
Filter element 90 µm	774290 	
Filter element 140 µm	774291 	
Interface accessories		
büS Stick Set		
 USB-büS-Interface Set 1, Type 8920 Detailed information can be found in chapter "5. Product accessories" on page 8.	772426 	
USB-büS Interface Set 2, Type 8920 (only büS Stick, cable and büS service cable)	772551 	
Connectors and sockets		
büS Y-connector, 5 pin M12 female to 5 pin M12 male and 5 pin M12 female	772420 	
büS Y-connector, 5 pin M12 female to 5 pin M12 male and 5 pin M12 female (power interrupt)	772421 	
büS adaptor M12 male A-coded - M12 male A-coded	772867 	
büS termination, 5 pin M12 male cable plug	772424 	
büS termination, 5 pin M12 female cable plug	772425 	
Extensions		
 5 pin M12 female and male straight cable plug moulded on cable, shielded	0.5 m	772403 
	1 m	772404 
	3 m	772405 
	5 m	772406 
	10 m	772407 
	20 m	772408 
Software		
Software Bürkert Communicator	Download Type 8920 