

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72	Краснодар (861)203-40-90	Рязань (4912)46-61-64
Астана (7172)727-132	Красноярск (391)204-63-61	Самара (846)206-03-16
Белгород (4722)40-23-64	Курск (4712)77-13-04	Санкт-Петербург (812)309-46-40
Брянск (4832)59-03-52	Липецк (4742)52-20-81	Саратов (845)249-38-78
Владивосток (423)249-28-31	Магнитогорск (3519)55-03-13	Смоленск (4812)29-41-54
Волгоград (844)278-03-48	Москва (495)268-04-70	Сочи (862)225-72-31
Вологда (8172)26-41-59	Мурманск (8152)59-64-93	Ставрополь (8652)20-65-13
Воронеж (473)204-51-73	Набережные Челны (8552)20-53-41	Тверь (4822)63-31-35
Екатеринбург (343)384-55-89	Нижний Новгород (831)429-08-12	Томск (3822)98-41-53
Иваново (4932)77-34-06	Новокузнецк (3843)20-46-81	Тула (4872)74-02-29
Ижевск (3412)26-03-58	Новосибирск (383)227-86-73	Тюмень (3452)66-21-18
Казань (843)206-01-48	Орел (4862)44-53-42	Ульяновск (8422)24-23-59
Калининград (4012)72-03-81	Оренбург (3532)37-68-04	Уфа (347)229-48-12
Калуга (4842)92-23-67	Пенза (8412)22-31-16	Челябинск (351)202-03-61
Кемерово (3842)65-04-62	Пермь (342)205-81-47	Череповец (8202)49-02-64
Киров (8332)68-02-04	Ростов-на-Дону (863)308-18-15	Ярославль (4852)69-52-93

Единый адрес: btk@nt-rt.ru **Веб-сайт:** www.burkert.nt-rt.ru

ДАТЧИКИ И РЕЛЕ ДАВЛЕНИЯ



Type 8323 can be combined with...




Type 8611
Universal PI
controller eControl



Type 2301 (8693)
Control valve system



Type 8619
multiCELL
Transmitter/Controller



PLC

Pressure transmitter for general applications, 0...25 bar

- Piezoresistive or thin film sensor element
- Available with hygienic flush diaphragm
- Housing and wetted parts in corrosion-resistant stainless steel
- Standard signal 4...20 mA for connection to automation systems
- Plug for quick installation and service

This pressure transmitter is designed to cover the majority of industrial applications in the field of industrial pressure measurement technology. High accuracy, compact design, robust construction and flexibility make this instrument universal and suitable for different measurement functions. For technical reasons the piezoresistive sensor element is used for measuring ranges up to 16 bar and the thin film sensor element for the measuring range of 25 bar. Wetted parts are made of stainless steel and completely welded. Internal seal elements, which could restrict the choice of measuring materials, are excluded.

General data	
Compatibility	Any pipe with sensor connection
Standard version	G 1/2" A according to DIN16288
Flush diaphragm version	G 1" B with O-ring (range up to 1.6 bar) G 1/2" B with O-ring (range > 1.6 bar) G 1" B hygienic version (all ranges) (Weld-on socket with connection G 1/2" B, G 1" B)
Materials	
Housing	Stainless steel 1.4301 (304)
Wetted parts	
Standard version	Stainless steel 1.4471 (316Ti)
Standard flush diaphragm version	Stainless steel 1.4471 (316Ti), FKM seal
Hygienic flush diaphragm version	Stainless steel 1.4435 (316L), EPDM seal
Internal transmitting liquid	Synthetic Oil (only for pressure range up to 16 bar or flush diaphragm units)
Electrical connections	4 pin cable plug according to EN 175301-803
Measuring range (Pressure reference = relative pressure [atmospheric])	0 up to 0.1; 0.16; 0.25; 0.4; 0.6; 1.0; 1.6; 2.5; 4.0; 6.0; 10.0; 16.0 or 25.0 bar (in PSI on request)
Measuring element	piezo (≤ 16 bar) / thin film (25 bar)
Fluid temperature	
Standard version	-20...+100 °C (-4...+212 °F)
Standard flush diaphragm version	-30...+100 °C (-22...+212 °F)
Hygienic flush diaphragm version	-20...+150 °C (-4...+302 °F)
Compensated T° range	0...+80 °C (32...+176 °F)
Temperature coefficient	in compensated T° range
Average Tc of zero	
Standard version	≤ 0.2 % of F.S.* /10K
Flush diaphragm version	$\leq -0.2...+0.3$ % of F.S.* /10K
Average Tc of Span	≤ 0.2 % of F.S.* /10K
Measurement deviation	≤ 0.5 % of F.S.* (2-point calibration) ¹⁾ ≤ 0.25 % of F.S.* (Best fit calibration, BFSL) ¹⁾
Hysteresis	≤ 0.1 % of F.S.*
Repeatability	≤ 0.05 % of F.S.*
1-year stability	≤ 0.2 % of F.S.* (at reference conditions)

¹⁾ Calibrated in vertical mounting position with pressure connection bottom

* F.S.=Full scale

Electrical data	
Power supply [Vs]	10...30 V DC
Reversed polarity of DC	Protected
Overvoltage protection	Yes
Short circuit protection	Yes
Output	Standard 4...20 mA signal, 2 wires
Load in Ω	$\leq (V_s [V] - 10 [V]) / 0.02 [A]$
Adjustability: Zero / span	$\pm 10 \%$
Response time	$\leq 1 \text{ ms}$
Environment	
Ambient temperature	
Standard version	-20...+80 °C (-4...+176 °F)
Standard flush diaphragm version	-20...+80 °C (-4...+176 °F)
Hygienic flush diaphragm version	-20...+80 °C (-4...+176 °F)
Storage temperature	
Standard version	-40...+100 °C (-40...+212 °F)
Standard flush diaphragm version	-40...+100 °C (-40...+212 °F)
Hygienic flush diaphragm version	-20...+100 °C (-4...+212 °F)
Standards, directives and certifications	
Protection class	IP65 with device wired and with cable plug mounted and tightened
Standard and directives CE	The applied standards, which verify conformity with the EU Directives, can be found on the EU Type Examination Certificate and/or the EU Declaration of conformity (if applicable) Complying with article 4, §1 of 2014/68/EU directive*
Pressure	


* The device conforms to Article 4, Paragraph 1 of the Pressure Equipment Directive 2014/68/EU under the following conditions:

- **Device used on a pipe** (PS = maximum admissible pressure; DN = nominal diameter of the pipe).

Type of fluid	Conditions
Fluid group 1, Article 4, Paragraph 1.c.i	DN ≤ 25
Fluid group 2, Article 4, Paragraph 1.c.i	DN ≤ 32 or PS*DN ≤ 1000
Fluid group 1, Article 4, Paragraph 1.c.ii	DN ≤ 25 or PS*DN ≤ 2000
Fluid group 2, Article 4, Paragraph 1.c.ii	DN ≤ 200 or PS ≤ 10 or PS*DN ≤ 5000

⚠ This table is independent of the chemical compatibility of the material and fluid. Please make sure the device materials are compatible with the fluid.

Dimensions [mm]

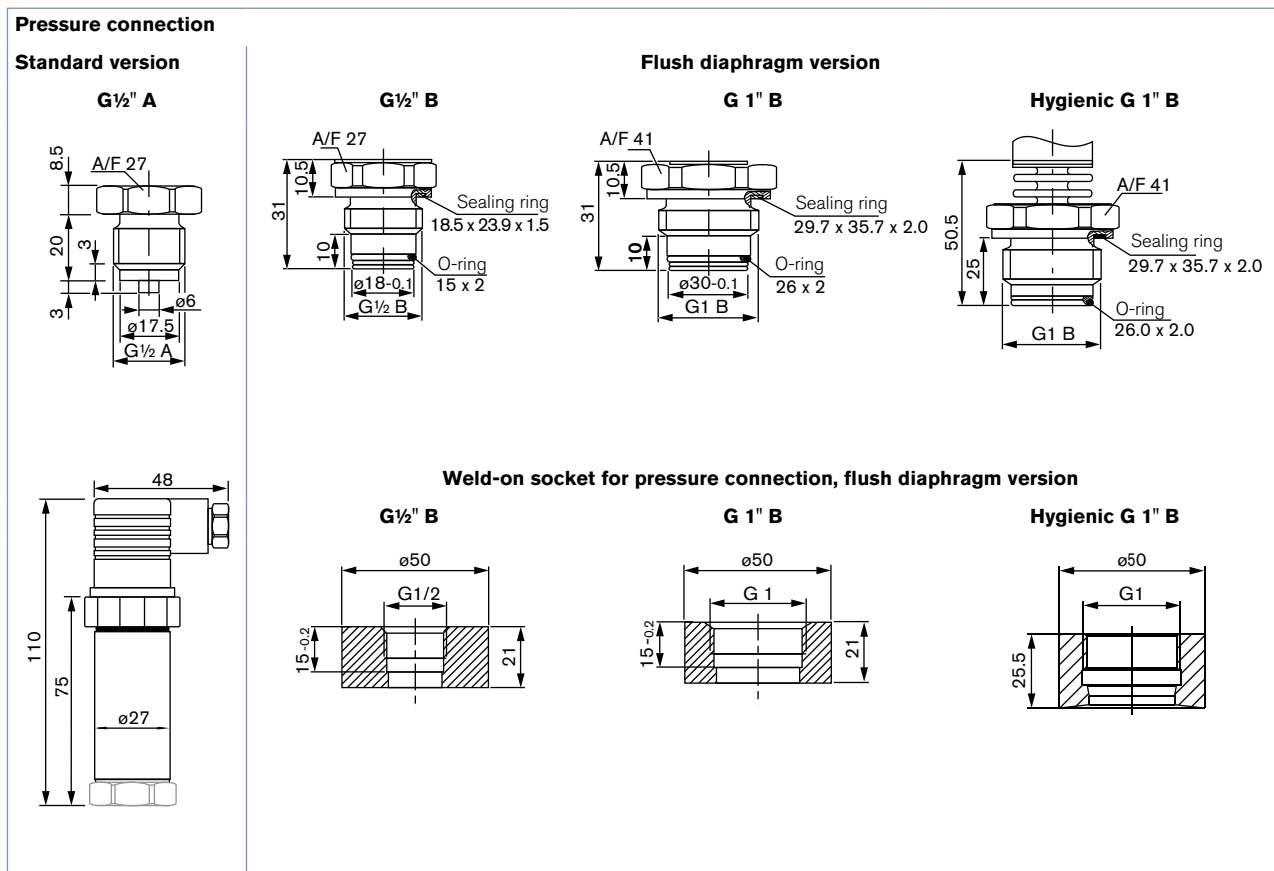

Ordering chart for Type 8323 (other versions on request)

Pressure range [bar]	Pressure max. [bar]	Bursting pressure [bar]	Power supply	Output signal	Article no.			
					Standard	Standard flush diaphragm G 1/2" B	Standard flush diaphragm G 1" B	Hygienic flush diaphragm G 1" B
0...0.10	1	2	10...30 V DC	4...20 mA	417692	-	552063	551803
0...0.16	1.5	2	10...30 V DC	4...20 mA	417693	-	552064	-
0...0.25	2	2	10...30 V DC	4...20 mA	417694	-	-	-
0...0.40	2	2	10...30 V DC	4...20 mA	417695	-	552065	551675
0...0.60	4	4	10...30 V DC	4...20 mA	417696	-	-	551676
0...1.00	5	5	10...30 V DC	4...20 mA	417697	-	552066	551677
0...1.60	10	10	10...30 V DC	4...20 mA	417698	-	-	551678
0...2.50	10	10	10...30 V DC	4...20 mA	417699	-	-	551679
0...4.00	17	17	10...30 V DC	4...20 mA	417700	-	-	-
0...6.00	35	35	10...30 V DC	4...20 mA	417701	552067	-	-
0...10.0	35	35	10...30 V DC	4...20 mA	417702	552068	-	551684
0...16.0	80	80	10...30 V DC	4...20 mA	417703	552069	-	-
0...25.0	50	250	10...30 V DC	4...20 mA	417704	-	-	-

Ordering chart for accessories (to be ordered separately)

Description	Article no.
Weld-on socket for Type 8323 with standard flush diaphragm version G 1/2"	443295
Weld-on socket for Type 8323 with standard flush diaphragm version G 1"	444137
Weld-on socket for Type 8323 with hygienic flush diaphragm version G 1"	443296

Interconnection possibilities with other Bürkert products

